

Signature

Multix Barrel



Driven by passion.

MB2

MIDBASS SPEAKER


- 50 mm (2") midbass
- Max. power 25 W / Nom. Power 50 W
- Frequency response 250 Hz - 30 kHz
- Impedance 4 Ω

TECHNICAL SPECIFICATIONS


Component	Midbass	
Max power	25 W	
Nominal power	50 W	
Impedance	2 Ω	
Freq. Response	250 Hz - 30 KHz	
Sensitivity (2,83V/1m)	88.5 dB	
Magnet	Neodymium	
Magnet size $\varnothing$ x h	47 x 23 mm	1.850 x 0.906"
Total driver displacement	0.02 l	0.001 cf
Weight of one component	1.037 kg	2.286 lb
Voice coil $\varnothing$	20 mm	0.787"
Voice coil height	0 mm	0.000 "
Dome	Aluminium	



Unit : mm

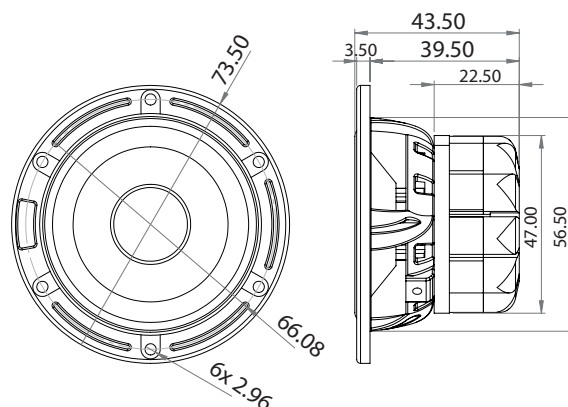

FREQUENCY RESPONSE / IMPEDANCE

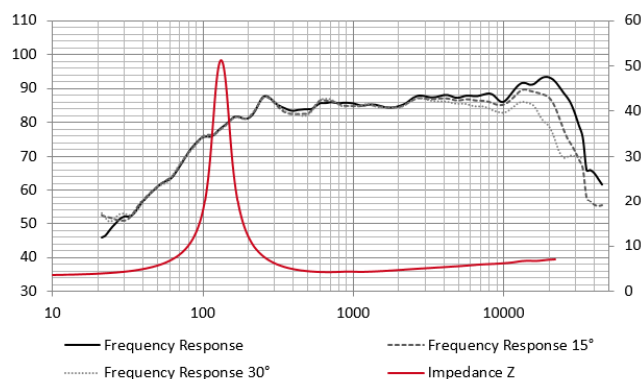

THIELE-SMALL PARAMETERS

Effective $\varnothing$ (d)	40.8 mm
Sd	16.61 cm ²
Xmax	2.0 mm
Re	3.5 Ω
Fs	131.84 Hz
Le	0.00 μ H @ 1 kHz
L2	30.00 μ H @ 10 kHz
Vas	0.308 L
Mms	1.82 g
Cms	0.8 m/N
BL	3.80 Tm
Qts	0.35
Qes	0.37
Qms	6.3
Sensitivity (dB/W/m)	84.88 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

blam-audio.com